

Stage : preferred dimensions 6mx4m available

drum riser preferred, minimum 240x160 cm

At least 5 distribution boxes with 4 outlets, 220V:16A

Behind the guitar amps are 2 lightboxes with the band logo

**Monitors / Monitor outputs** : preferably 5, in order of importance

1 XLR towards lead vocals (has own monitoring system)


2 XLR towards drum kit (has own monitoring system)

3 XLR towards keyboard (has own monitoring system)

4 at Guitar

5 at Bass. If 5 = not possible, shared position with 4

Changeover time : at least 30 minutes

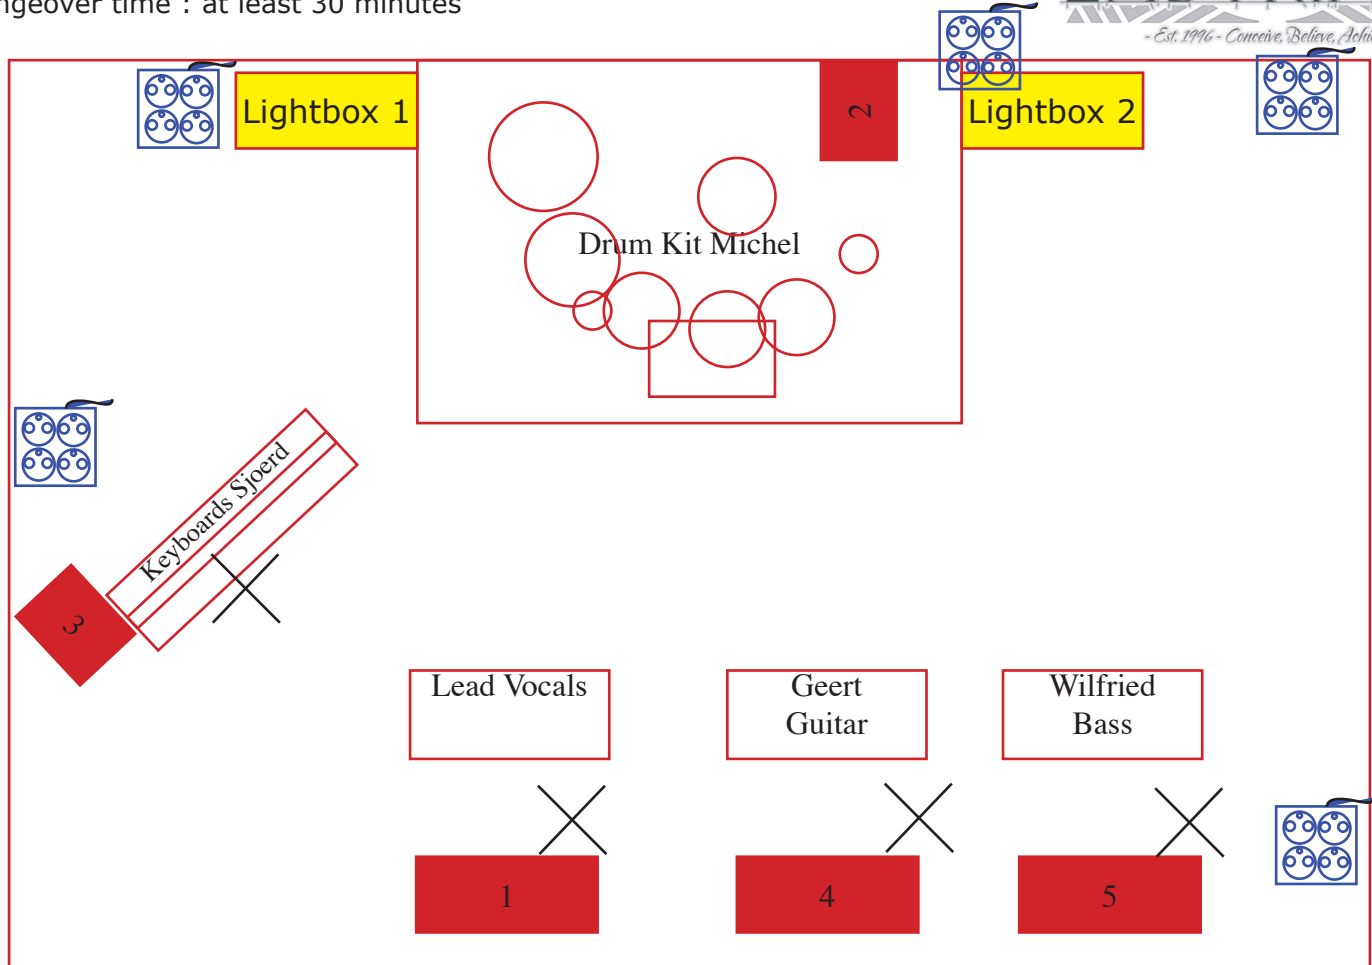

1	BD	
2	SNR	
3	12" Tom	
4	13" Tom	
5	14" Tom	
6	16" Floor	
7	18" Floor	
8	Hi Hat	
9	Ride	
10	OH L	
11	OH R	
12	Bass	DI from pedal
13 - 14	Keyboards	from submix XLR
15 - 16	Guitar L-R Geert	DI
17	Lead Vocals	
18	Backing Vocals Geert	
19	Backing Vocals Wilfried	
20	Backing Vocals Sjoerd	